Index No. 3823123

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 20, Township 38, Range 23, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
On 08/11/2004 Set a Kanabec County Monument.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation

Northing= 116237.27

Easting= 414547.73

Note: NAD 1983, HARN 1996 Adjustment coordinates are NOT compatible with NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

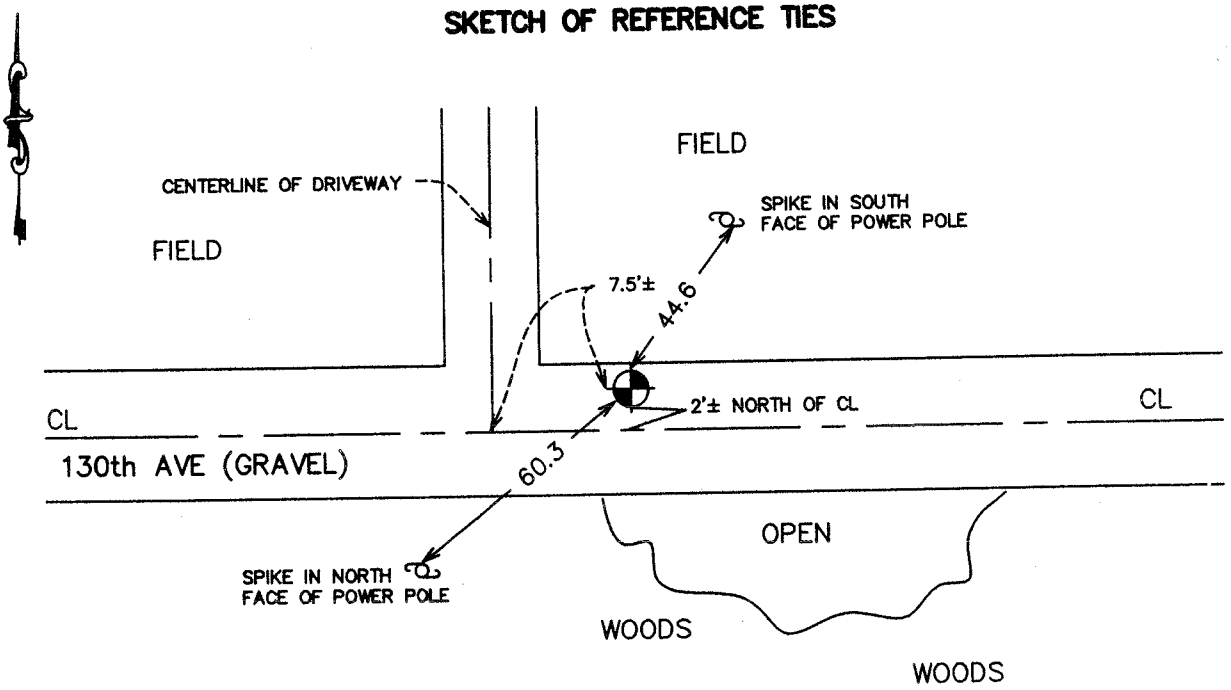

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Signature

9-1-2004
Date

Registration No. 9808

■ Land Surveyor, [ ] Professional Engineer

[ ] County Surveyor, [ ] County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

N 1/4 COR SEC 20, T38, R23

Original corner was set by Deputy Surveyor Silas Barnard in August 1855. No evidence for the corner or the original bearing trees remain. This corner falls on the center line of an east–west gravel road and on an occupation line to the north.

In December of 1902, John Nelson did a survey of Section 20 and recorded it in the Survey Book at the County Surveyor's Office. In his notes he stated that he set a stone with an "x" at all section corners and quarter posts.

In July 2004, we ran a survey around Section 20 to locate existing monuments and tie in lines of occupation. This corner falls at the centerline of an east–west gravel road and east of a driveway to the north.

On August 11, 2004, we made an excavation 25'x8'x4', 1' into natural ground. No evidence was found in the excavation.

We set this corner on line and equidistant from the Northeast and Northwest corners of the section. We took ties and established Kanabec County Coordinates on this position.